Mars 400S Pro Firmware Update

Mars 400S Pro release note

Release date	Firmware version	Updates	Firmware download
For V1.1.X.X H110, except V1.1.0.3			
2022-04-06	V1.1.2.1	• Upgrade Optimization • Change Logo • Fix the other known problems	https://download.hollyland.com/Firmware/Video_transmissions/Mars_400S_Pro/V1.1.2.1.zip
2021-06-04	V1.1.1.9	• Optimized pairing compatibility • Fix the other known problems	https://download.hollyland.com/Firmware/Video_transmissions/Mars_400S_Pro/V1.1.1.9.zip
For V1.0.X.X			
2021-04-14	V1.0.2.0	• Optimized pairing compatibility • Fixed another known problem	https://download.hollyland.com/Firmware/Video_transmissions/Mars_400S_Pro/V1.0.2.0.zip

Attentions

- Make sure the device have enough power when updating, pls don't unplug the USB disk before the update process is completed and successful.
- The device will change to default settings automatically after updated.
- **The firmware updating takes the risks to cause unknown error, pls do not upgrade the device when you using it on-site.**
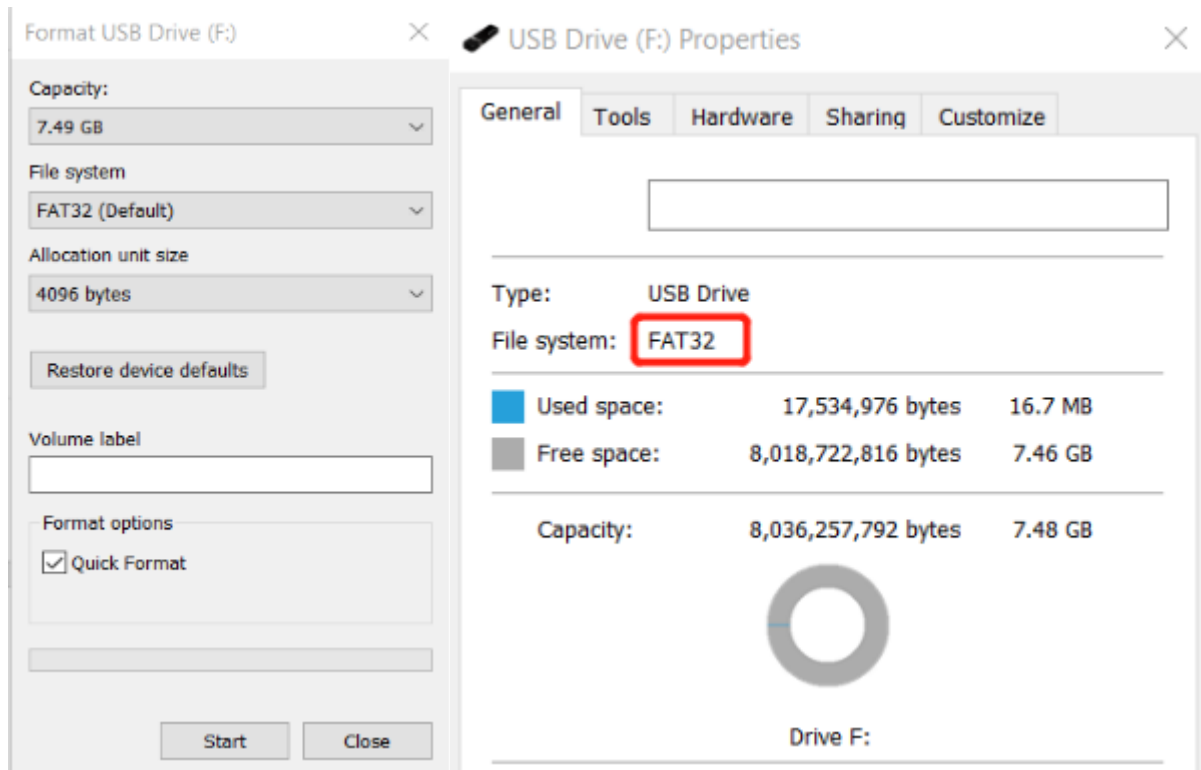
How to check the device`s firmware version
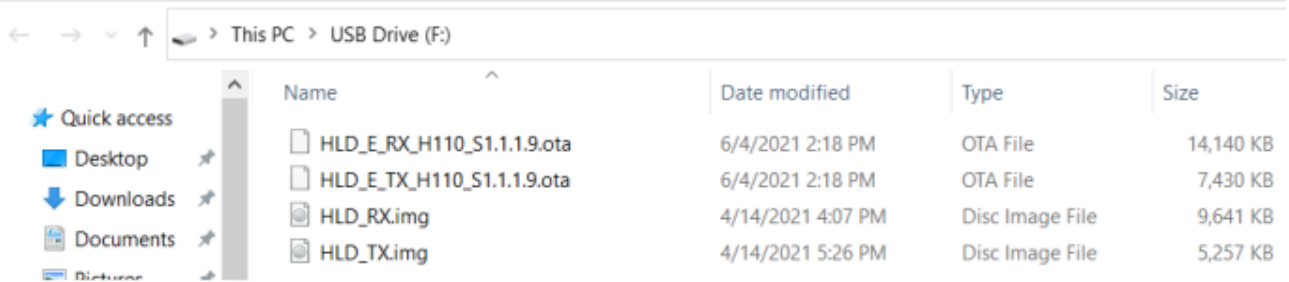
Menu Button

Long press the middle button to enter the menu page, select the version info to check the firmware version.

Operations to update the Mars 400S Pro firmware version

1. Prepare a USB flash disk with Type-C connector and storage less than 32GB, format the USB disk to FAT32.

Format USB Drive (F:)

Capacity:
7.49 GB

File system
FAT32 (Default)

Allocation unit size
4096 bytes

Restore device defaults

Volume label

Format options
☑ Quick Format

Start   Close

USB Drive (F:) Properties

| General | Tools | Hardware | Sharing | Customize |

Type: USB Drive
File system: FAT32

■ Used space:	17,534,976 bytes	16.7 MB
▨ Free space:	8,018,722,816 bytes	7.46 GB
Capacity:	8,036,257,792 bytes	7.48 GB

Drive F:

2. Download the firmware to USB flash disk and make sure it is under the root directory, pls don't put it inside of any folder.

← → ∨ ↑ 🖴 > This PC > USB Drive (F:)

Name	Date modified	Type	Size
⬜ HLD_E_RX_H110_S1.1.1.9.ota	6/4/2021 2:18 PM	OTA File	14,140 KB
⬜ HLD_E_TX_H110_S1.1.1.9.ota	6/4/2021 2:18 PM	OTA File	7,430 KB
◉ HLD_RX.img	4/14/2021 4:07 PM	Disc Image File	9,641 KB
◉ HLD_TX.img	4/14/2021 5:26 PM	Disc Image File	5,257 KB

★ Quick access
■ Desktop
⬇ Downloads
📄 Documents
🖼 Pictures

3. Connect the USB disk to Mars 400S Pro via type-C port, it will recognize the USB disk automatically and start to updating

Type-C Port

USB-C Convertor

USB flash disk

UPGRADING
>>>>   50%
v1.0.1.6
→ v1.1.1.9

RECEIVER
mars 400S PRO

If update failed after tried several times, you can contact with our technical support team from Hollyland for help: support@hollyland.com